



PRODUCT RANGE

2 0 1 5



İLGi

For Better Farming

İlgi Tarım Makinaları
09260 Söke - AYDIN /TURKEY
T: +90 256 554 67 00 F: +90 256 554 60 07
www.ilgitarim.com.tr • info@ilgitarim.com.tr

İLGi

For Better Farming

1- DISCHARROW.....1-5

AGB	1
AGB-K	1
SUPERSTAR	2
AGL	2
CHD	3
ATD	3
TEXAS	4
ARAGON	4
ARAGON - K	5
ARAGON XL	5

2- CULTIVATOR.....6-7

APOLLO FIX	6
APOLLO	6
FORZA	6
APOLLO - K	7

3- LAND LEVELER.....8-10

OMG	8
JNR	8
GECS	9
C SERIES	9
HTSV	10
SKP	10

4- LAND ROLLER.....11

AMR	11
-----------	----

5- ROTARY TILLER.....12

SRT - Fixed Rotary Tiller	12
MRT - Rotary Tiller Mechanical Side Shifting	12
HRT - Rotary Tiller Hydraulic Side Shifting	12



AGB

HEAVY DUTY DISCHARROW, OFFSET



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
18 AGB 56	18	200	1380	60 - 70
20 AGB 56	20	220	1460	70 - 80
22 AGB 56	22	240	1520	80 - 90
24 AGB 56	24	260	1580	90 - 100
26 AGB 56	26	280	1640	100 - 110
28 AGB 56	28	300	1680	110 - 120
30 AGB 56	30	320	1850	120 - 130
32 AGB 56	32	340	1930	130 - 140
34 AGB 56	34	360	2010	140 - 150
36 AGB 56	36	380	2100	150 - 160

Disc spacing (mm): 230
Standard disc diameter is 560 mm
610 mm ve 660 mm Disc Diameter models are optional

AGB - K

HEAVY DUTY FOLDING DISCHARROW, OFFSET



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
40 AGB-K 56	40	450	2985	150 - 180
44 AGB-K 56	44	500	3088	170 - 200
48 AGB-K 56	48	550	3190	190 - 210
52 AGB-K 56	52	600	3294	210 - 240
56 AGB-K 56	56	650	3397	230 - 260
60 AGB-K 56	60	700	3515	250 - 280
64 AGB-K 56	64	750	3650	280 - 320

Disc spacing (mm) : 230
Standard disc diameter is 560 mm
610 mm ve 660 mm Disc Diameter models are optional

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.

SUPER STAR

HEAVY DUTY DISCHARROW, OFFSET



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	WEIGHT ROLLER (KG)	HP
20 SPR 56	20	220	1850	400	70 - 100
22 SPR 56	22	240	1900	420	90 - 120
24 SPR 56	24	260	1950	440	100 - 140
26 SPR 56	26	280	2000	460	110 - 150
28 SPR 56	28	300	2050	480	120 - 160
30 SPR 56	30	320	2100	500	130 - 170
32 SPR 56	32	340	2150	520	140 - 180
34 SPR 56	34	360	2200	540	150 - 190
36 SPR 56	36	380	2250	560	160 - 200

Disc spacing (mm) : 230
Standard disc diameter is 560 mm
610 mm ve 660 mm Disc Diameter models are optional

AGL

LIGHT TYPE DISCHARROW, OFFSET



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
28 AGL 46	28	260	1630	70 - 90
32 AGL 46	32	298	1730	80 - 100
36 AGL 46	36	322	1860	90 - 110
40 AGL 46	40	346	1960	100 - 120
44 AGL 46	44	370	2060	110 - 130
48 AGL 46	48	394	2160	120 - 150

Disc spacing (mm) : 175
510 mm Disc Diameter models are optional

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.



CHD

TRAILED AND MOUNTED DISCHARROW, OFFSET



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
24 CHD 46	24	200	625	50 - 70
28 CHD 46	28	235	700	60 - 80
32 CHD 46	32	270	730	70 - 90
36 CHD 46	36	305	850	80 - 100
40 CHD 46	40	340	940	90 - 110
44 CHD 46	44	375	1020	100 - 120
48 CHD 46	48	410	1105	120 - 140

Disc spacing (mm) : 175
Standard disc diameter 460 mm
Optional disc diameter 510mm

ATD

MOUNTED DISCHARROW, TANDEM



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
20 ATD 46	20	215	400	40 - 60
24 ATD 46	24	230	440	50 - 70
28 ATD 46	28	245	520	60 - 80
32 ATD 46	32	260	600	70 - 100

Disc spacing (mm) : 175
Standard disc diameter 460 mm
Optional disc diameter 510mm

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.

TEXAS

LIGHT COMPACT DISC TILLER



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT (KG)	HP
TX - 20	20	250	1098	70 - 90
TX - 24	24	300	1294	80 - 100
TX - 28	28	350	1492	90 - 110

560 mm Disc Diameter models are optional

ARAGON

DISC TILLER



MODEL	NO OF DISC	WORK WIDTH (CM)	WEIGHT PIPE ROLLER(KG)	WEIGHT DISC ROLLER(KG)	HP
MX 20	20	250	1393	1774	80-120
MX 24	24	300	1557	1986	100-140
MX 28	28	350	1701	2200	120-160

Disc spacing (mm) : 510
560 mm Disc Diameter models are optional



ARAGON-K

FOLDING DISC TILLER



MODEL	FRAME	NO OF DISC	WORK WIDTH (CM)	WEIGHT PIPE ROLLER (KG)	WEIGHT DISC ROLLER (KG)	HP
MX-K 32	Mount Type	32	400	2524	3180	130-170
	Mount Type	32	400	3588	4244	
MX-K 36	Mount Type	36	450	2665	3367	150 - 190
	Trailed Type	36	450	3729	4430	
MX-K 40	Mount Type	40	500	2810	3555	170 - 210
	Trailed Type	40	500	3873	4620	
MX-K 44	Mount Type	44	550	2983	3768	180 - 200
	Trailed Type	44	550	4047	4832	
MX-K 48	Mount Type	48	600	3158	3982	190 - 230
	Trailed Type	48	600	4222	5046	
MX-K 72	Trailed Type	72	900	8078	9480	360 - 400

ARAGON-XL

FOLDING DISC TILLER



All Data are not binding and subject to change without prior notice *
 Power Requirement may vary depending on soil conditions.

Disc spacing (mm) : 510
 560 mm Disc Diameter models are optional



APOLLO FIX

HEAVY TYPE CULTIVATOR

MODEL	NO OF TINE	WORKING WIDTH (CM)	WEIGHT PIPE ROLLER (KG)	WEIGHT DISC ROLLER (KG)	HP
APLF 300	10	300	1475	1880	100 - 150
APLF 350	12	350	1580	2006	120 - 180

APOLLO

HEAVY TYPE SPRING CULTIVATOR



MODEL	NO OF TINE	WORK WIDTH (CM)	WEIGHT PIPE ROLLER (KG)	WEIGHT DISC ROLLER (KG)	HP
APL 300	10	300	1995	2295	115 - 130
APL 350	12	350	2204	2600	120 - 170



FORZA

LIGHT SPRING CULTIVATOR

MODEL	NO OF TINE	WORK WIDTH (CM)	WEIGHT (KG)	HP
FRZ-5	5	250	745	70 - 100
FRZ-7	7	300	925	90 - 130
FRZ-9	9	350	1105	120 - 170




APOLLO-K

HEAVY TYPE SPRING CULTIVATOR



MODEL	FRAME	NO OF TINE	WORK WIDTH (CM)	WEIGHT PIPE ROLLER (KG)	WEIGHT DISC ROLLER (KG)	HP
APL 400	Mounted Type	13	400	2914	3837	150 - 180
	Trailed Type	13	400	4430	4900	150 - 180
APL 500	Mounted Type	16	500	3942	4340	200 - 250
	Trailed Type	16	500	5280	5405	200 - 250

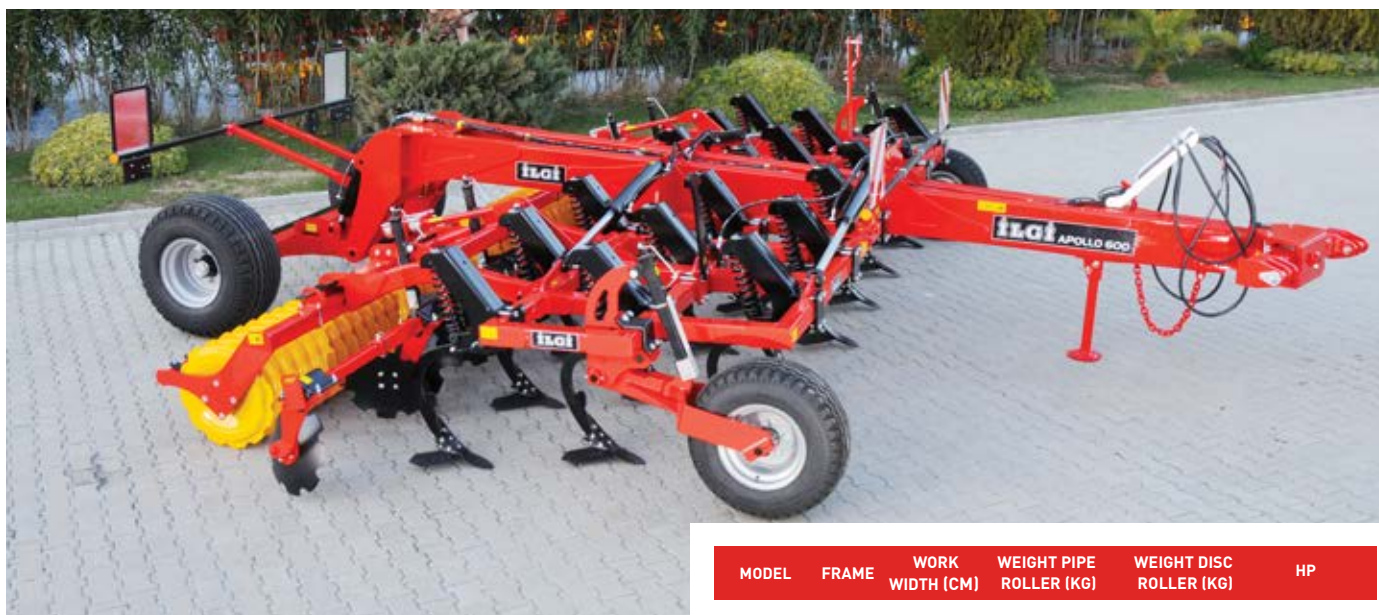

MODEL	FRAME	WORK WIDTH (CM)	WEIGHT PIPE ROLLER (KG)	WEIGHT DISC ROLLER (KG)	HP
APL 600	19	600	6220	7120	240 - 280
APL 700	23	700	6790	7700	280 - 310
APL 800	25	800	6990	7890	300 - 350

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.

OMG

LASER LAND LEVELER



MODEL	WORK WIDTH (CM)	WEIGHT (KG)	HP
OMEGA 35	350	2050	85 - 120
OMEGA 40	400	2100	100 - 140
OMEGA 50	500	2290	120 - 180
OMEGA 60	600	2640	160 - 210
OMEGA 50 - AC	500	3510	120 - 180
OMEGA 60 - AC	600	3680	160 - 210
OMEGA 70 - AC	730	4420	230 - 280
OMEGA 80 - AC	800	4860	280 - 350

JNR

LASER LAND LEVELER



MODEL	WORK WIDTH (CM)	WEIGHT (KG)	HP
JUNIOR 2500	250	980	60 - 80
JUNIOR 3000	300	1082	70 - 90

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.



GE SERIES


GATED EJECTION SCRAPER



MODEL	CAPACITY (M³)	CUTTING WIDTH (CM)	WEIGHT (KG)	TYRE	HP
GECS-1710,5	12	3000	9200	11 X 16	250 - 350
GECS-2012	15	3660	10640	13.00 X 24	350 - 400
GECS-2214	18	4300	13500	20.5 X 25	375 - 500

C SERIES

SCRAPER

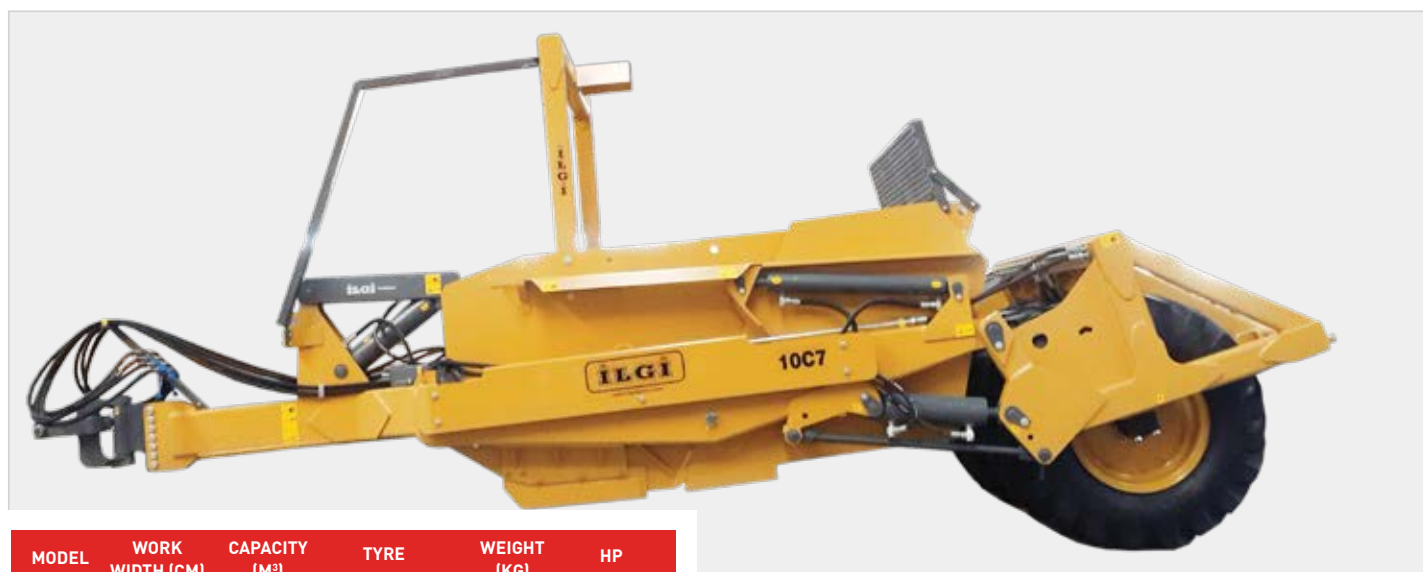


MODEL	WORK WIDTH (CM)	CAPACITY (M³)	TYRE	WEIGHT (KG)	HP
6 C 7	180	4.6	11 X 16	2405	75 - 150
10 C 7	210	7.6	13.00 X 24	3640	180 - 250
14 C 10	300	10.7	20.5 X 25	7205	250 - 300

All Data are not binding and subject to change without prior notice * Power Requirement may vary depending on soil conditions.

HTSV

PRECISION LAND LEVELER

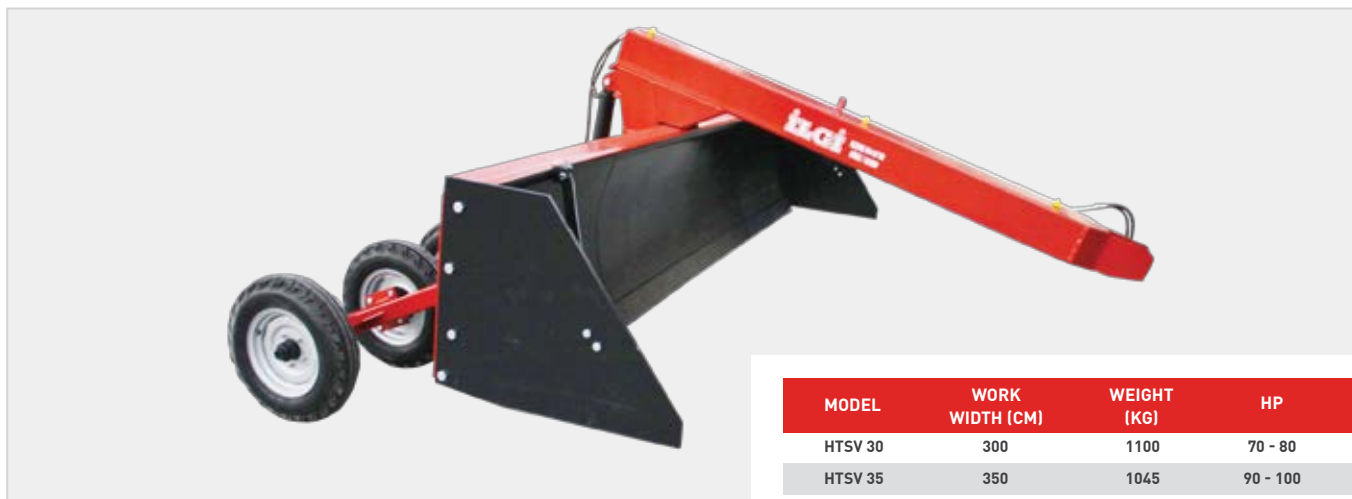

MODEL	WORK WIDTH (CM)	WEIGHT (KG)	HP
HTSV 30	300	1100	70 - 80
HTSV 35	350	1045	90 - 100
HTSV 40	400	1200	110 - 130
HTSV 50	500	1310	140 - 160
HTSV 60	600	1420	180 - 200

SKP

SCRAPER



MODEL	CUTTING WIDTH (CM)	CAPACITY (M³)	WEIGHT (KG)	HP
SKP 3	153	1.15	700	50-70
SKP 4	183	1.50	750	70-90
SKP 5	233	2.30	950	90-120



AMR

HEAVY TYPE ROLLER



	MODEL	WORK WIDTH (CM)	WEIGHT (KG)	HP
RING TYPE	AMR 450-B	450	1760	70 - 90
	AMR 620-B	620	2120	110 - 130
	AMR 720-B	720	2600	140 - 160
	AMR 820-B	820	3080	160 - 200
CAMBRIDGE TYPE	AMR 450-M	450	2480	70 - 90
	AMR 620-M	620	2480	110 - 140
	AMR 720-M	720	3320	150 - 170
	AMR 820-M	820	3800	170 - 210

SRT

FIXED ROTARY TILLER



MODEL	NO OF BLADE	WORK WIDTH (CM)	WEIGHT (KG)	HP
SRT160	36	160	452	45 - 65
SRT185	42	185	486	55 - 75
SRT210	48	210	517	65 - 85

MRT

ROTARY TILLER MECHANICAL SIDE SHIFTING

MODEL	NO OF BLADE	WORK WIDTH (CM)	WEIGHT (KG)	HP
MRT 160	36	160	507	45-65
MRT 185	42	185	540	55-75
MRT 210	48	210	573	65-85



HRT

ROTARY TILLER HYDRAULIC SIDE SHIFTING



MODEL	NO OF BLADE	WORK WIDTH (CM)	WEIGHT (KG)	HP
HRT 160	36	160	452	45-65
HRT 185	42	185	486	55-75
MRT 210	48	210	517	65-85

